
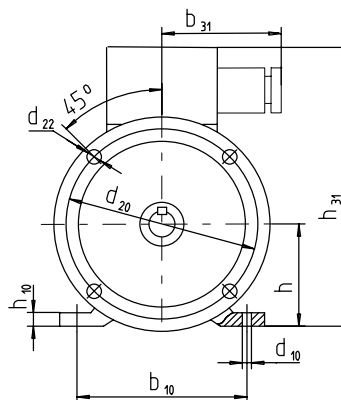


Габаритный чертеж IM 2001 / IM B35

Взрывозащищенные двигатели

Dimension drawing IM 2001 / IM B35

Explosion - proof motors

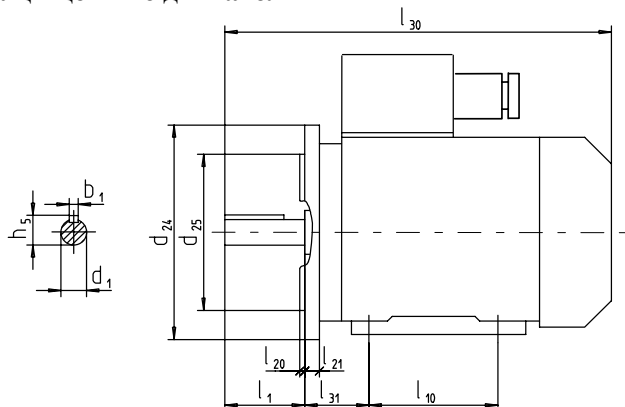

Размеры в мм.

Dimensions in mm.


Тип Type	Число полосов No. of poles	l_{30}	h_{31}	b_{31}	d_{24}	l_1	l_{10}	l_{20}	l_{21}	l_{31}	d_1	d_{10}	d_{20}	d_{22}	d_{25}	b_1	b_{10}	h	h_5	h_{10}
BA, БАБ**, БАК**100S	2, 4	420 / 435**	345	165	250	60	112	4	15	63	28	12	215	15	180	8	160	100	31,0	14
BA, BAP*132S2, SA4, S4, SA6, SB6	2, 4, 6	545 / 560*	460	200	350	80	140	5	14	89	38	12	300	19	250	10	216	132	41	20
BA, BAP*132S6	6	590 / 605*	460	200	350	80	140	5	14	89	38	12	300	19	250	10	216	132	41	20
BA, BAP*132M	2, 4, 6	590 / 605*	460	200	350	80	178	5	14	89	38	12	300	19	250	10	216	132	41	20
BA, BAP*160S	2	605 / 630*	520	230	350	110	178	5	15	108	42	15	300	19	250	12	254	160	45	20
BA, BAP*160M	2	645 / 670*	520	230	350	110	210	5	15	108	42	15	300	19	250	12	254	160	45	20
BA, BAP*160S	4, 6, 8	605 / 630*	520	230	350	110	178	5	15	108	48	15	300	19	250	14	254	160	51,5	20
BA, BAP*160M	4, 6, 8	645 / 670*	520	230	350	110	210	5	15	108	48	15	300	19	250	14	254	160	51,5	20
BA180S	2	645	500	230	400	110	203	5	15	121	48	15	350	19	300	14	279	180	51,5	23
BA180M	2	705	500	230	400	110	241	5	15	121	48	15	350	19	300	14	279	180	51,5	23
BA180S	4	645	500	230	400	110	203	5	15	121	55	15	350	19	300	16	279	180	59	23
BA180M	4, 6, 8	705	500	230	400	110	241	5	15	121	55	15	350	19	300	16	279	180	59	23
BA200M	2	890	595	230	450	110	267	5	16	133	55	19	400	19	350	16	318	200	59	28
BA200L	2	890	595	230	450	110	305	5	16	133	55	19	400	19	350	16	318	200	59	28
BA200M	4	920	595	230	450	140	267	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200L	4	920	595	230	450	140	305	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200M	6, 8	830	595	230	450	140	267	5	16	133	60	19	400	19	350	18	318	200	64	28
BA200L	6, 8	920	595	230	450	140	305	5	16	133	60	19	400	19	350	18	318	200	64	28
BRA200LA	2	800	595	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA200LB	2	890	595	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA200L	4, 6, 8, 12	800	595	230	400	110	305	5	16	133	55	19	350	19	300	16	318	200	59	28
BRA225M	2	890	620	230	450	110	311	5	16	149	55	19	400	19	350	16	356	225	59	31
BRA225S	4	920	620	230	450	140	286	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	4	920	620	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	6	920	620	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225S	8	830	620	230	450	140	286	5	16	149	60	19	400	19	350	18	356	225	64	31
BRA225M	8	920	620	230	450	140	311	5	16	149	60	19	400	19	350	18	356	225	64	31

В двигателях H200-225 количество отверстий d_{22} - 8

Quantity of the holes d_{22} in the motors H200-225 are 8

Возможные варианты исполнений взрывозащищенных двигателей.

Explosion - proof motors versions.

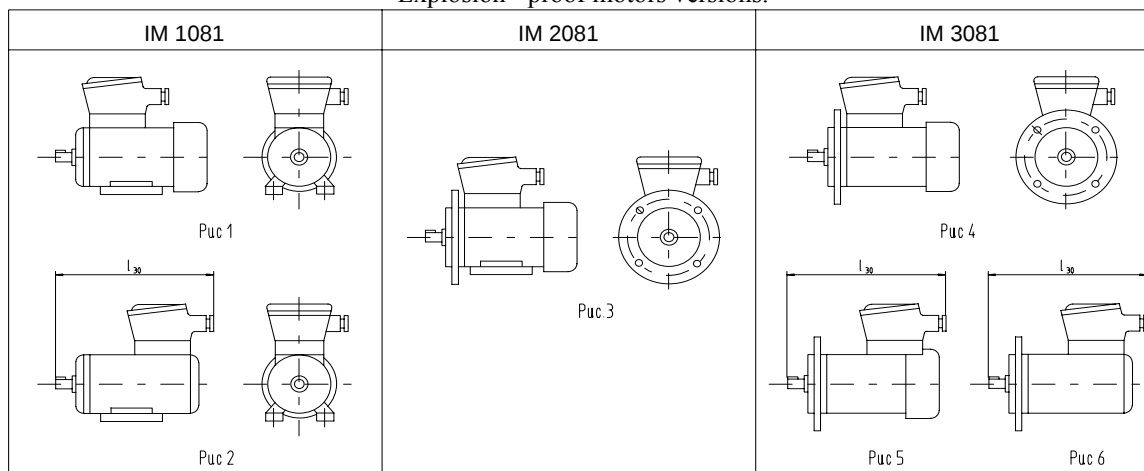

Тип двигателя Motor type	Возможные варианты Versions
BA100, BA132, BAP132, BA160, BAP160, BA180, BA200, BRA225	Рис. 1, 3, 4
БАК100	Рис. 5
БАБ100	Рис. 2, 6